


# Section 3

## GAS STRUTS

3 - GAS STRUTS



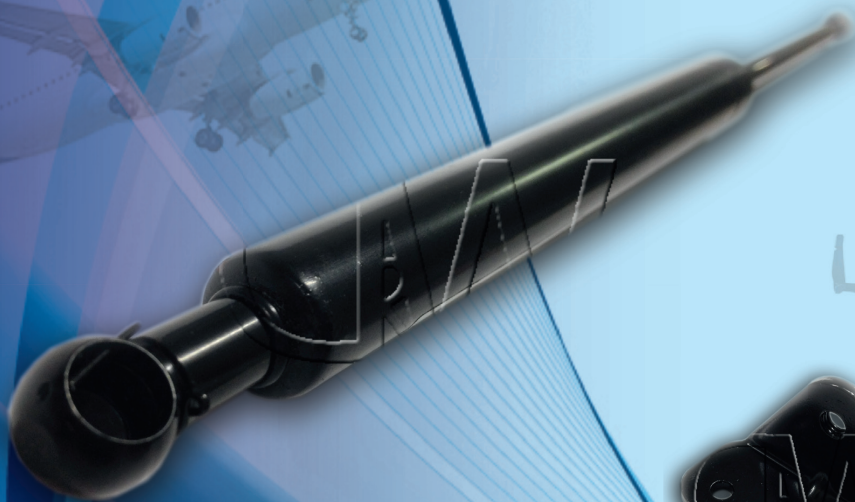


## **INDUSTRIAL GAS STRUTS**

Make opening and closing of doors, tailgates, boots, etc, a breeze with these quality gas struts.

Available in: Black Finish or Stainless Steel

Features:

- Quality control from factory with 20,000 cycle testing and 150 hours of shaft salt exposure testing
- Quality product, tried and tested in the market
- Well oiled seal and brass guided shaft
- Manufactured with additional backup seal in case primary seal fails
- Custom strut lengths and pressures available upon request.
- Struts have a dampener which prevents launching door unit at user, also stops door collapsing on user.

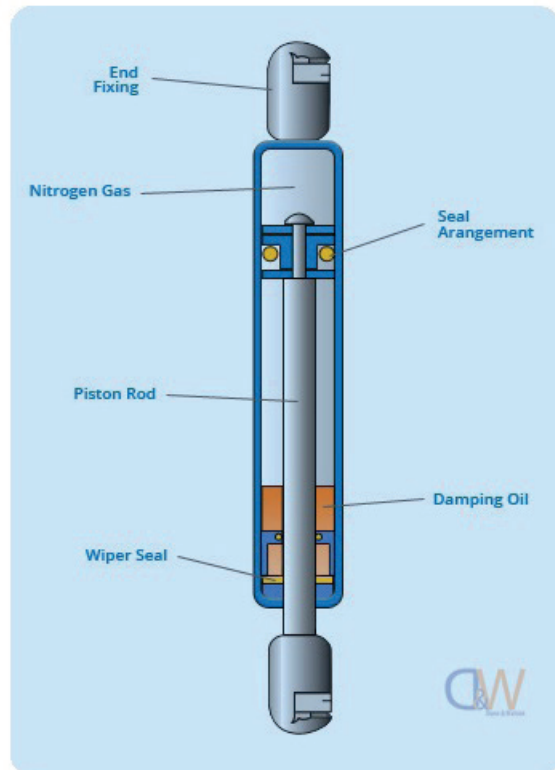

**3 - GAS STRUTS**

### 6 x 15 Struts:



Extended Length (A)	Stroke Length (B)	Compressed Range (C)	Newtons of Force
195mm	60mm	135mm	100n - 400n
316mm	120mm	195mm	100n - 400n

### 8 x 18 Struts:

Extended Length (A)	Stroke Length (B)	Compressed Range (C)	Newtons of Force
500mm	215mm	290mm	100n - 700n
595mm	260mm	335mm	100n - 700n

### 10 x 22 Struts:


Extended Length (A)	Stroke Length (B)	Compressed Range (C)	Newtons of Force
700mm	310mm	390mm	100n - 1200n
816mm	365mm	451mm	100n - 1200n

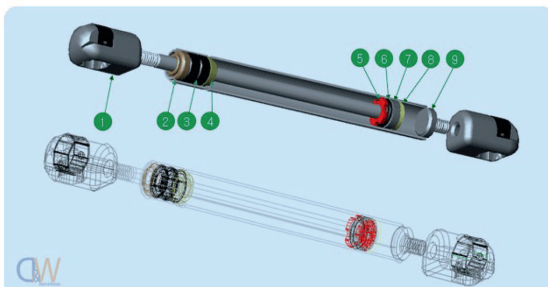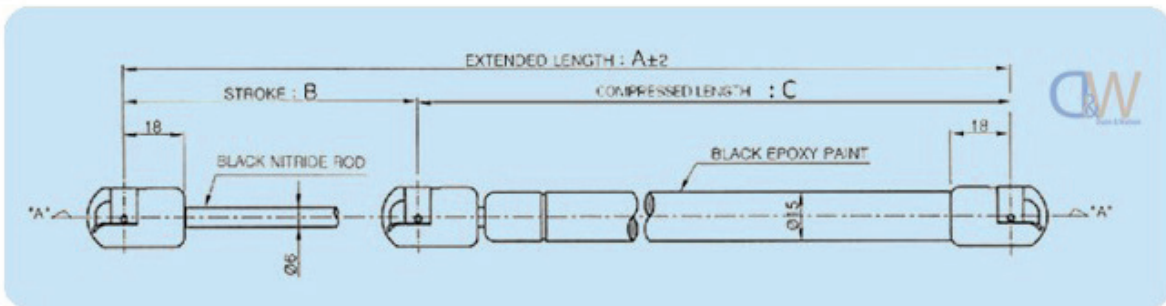

NO	PART NAME	MATERIAL	Q'TY
1	Plastic Socket	PA66+G/F 30%	2
2	Rod Guide	phenol	1
3	Oil Seal	NBR + S P C C	2
4	Seal Stopper	PA66+G/F 30%	1
5	Ring Stopper	S P C C	1
6	O-Ring	NBR	1
7	Piston	PA66+G/F30%	1
8	Piston Stopper	S P C C	1
9	Lower Cap	S 15 C	1

**Part No. GS0116**

**Brackets:**

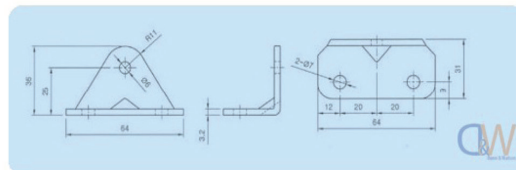




## ***GAS STRUT BRACKETS AND FITTINGS***

**Ball Ends:**




**Part No. GS0107**

**10mm Ball Ends**

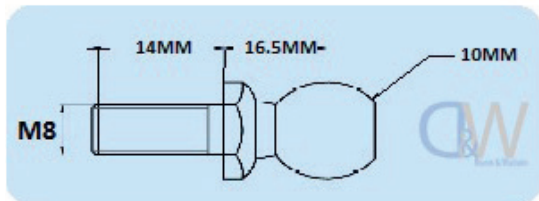

**Part No. GS0108**

**13mm Ball Ends**

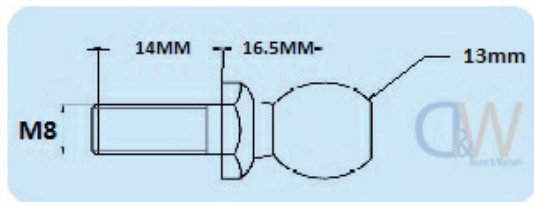


**Ball End Gloves:**




**Part No. GS0111**

**10mm Glove:**

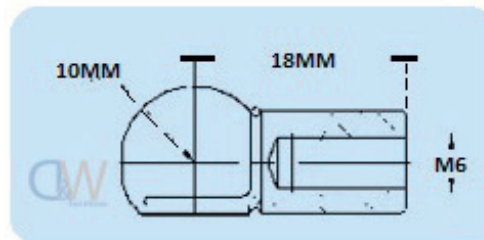

**Part No. GS0112**

**13mm Glove:**

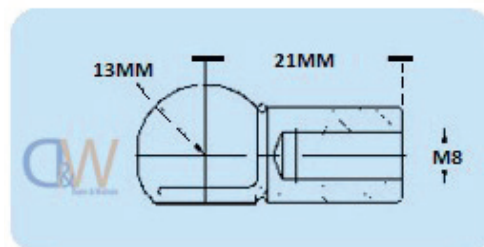

**3 - GAS STRUTS**

3 - GAS STRUTS



### 3 - GAS STRUTS

Phone: 07 3077 6699 Fax: 07 3103 8650  
Email: [sales@dunnandwatson.com.au](mailto:sales@dunnandwatson.com.au)